


D - CLIP DATA MOUNT

TECHNICAL DATA		
MATERIAL	NYLON	NYLON-CF
COLOUR	WHITE / BLACK / RED / GRAY	WHITE / BLACK / RED / GRAY
OPERATING TEMPERATURE	-20 °C to 90 °C	-30 °C to 120 °C
UV RESISTANT	PASS	PASS
CHEMICAL RESISTANT	HIGH	HIGH
FLAME RESISTANT	V - 1 (90 SEC) LSF	V - 0 (60 SEC) LSF
APPLICATION	INDOOR / OUTDOOR	INDOOR / OUTDOOR


* Technical Information subject to change without prior notice. Following UL, IEC Norms

* In house Lab reports can be available upon request.


- Preferable used for fiber optic cable run
- smooth profile allows minimum stress and strain
- Can be used vertical or horizontally

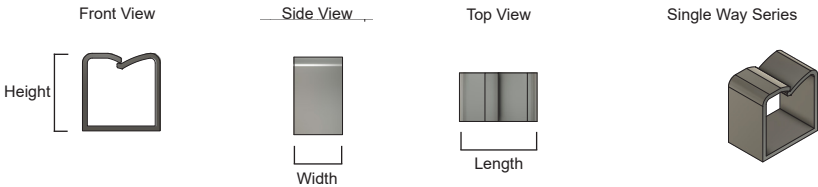

D CLIP DATA MOUNT - SINGLE BUNCH					
Part No.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	STATIC LOAD(KG)
ADCDM - SI 01	20	32	32	24 x 1 WAY	250

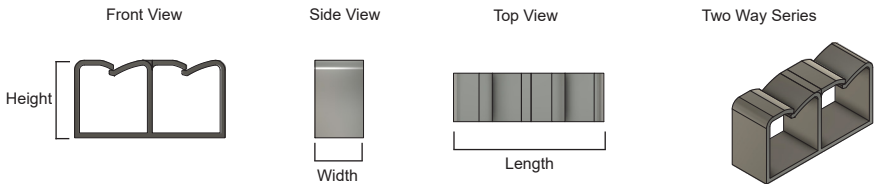

D CLIP DATA MOUNT - TWO WAY					
Part No.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	STATIC LOAD(KG)
ADCDM - TW 01	20	62	32	24 x 2 WAY	475

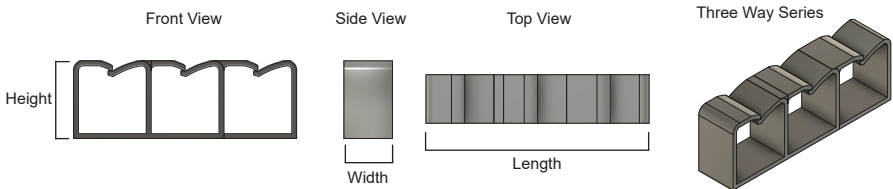

D CLIP DATA MOUNT - THREE WAY					
Part No.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	STATIC LOAD(KG)
ADCDM - TH 01	20	92	32	24 x 3 WAY	725

* Standard Packing is 100 pcs (Pkt)

* Tolerance Width + / - 0.30 Thickness + / - 0.20

* Optional Colour, Sizes can be provided upon request