


RIGHT ANGLE CABLE TIE MOUNT


TECHNICAL DATA		
MATERIAL	NYLON	NYLON-CF
COLOUR	WHITE / BLACK / RED / GRAY	WHITE / BLACK / RED / GRAY
OPERATING TEMPERATURE	-20 °C to 90 °C	-30 °C to 120 °C
UV RESISTANT	PASS	PASS
CHEMICAL RESISTANT	HIGH	HIGH
FLAME RESISTANT	V - 1 (90 SEC) LSF	V - 0 (60 SEC) LSF
APPLICATION	INDOOR / OUTDOOR	INDOOR / OUTDOOR

* Technical Information subject to change without prior notice. Following UL, IEC Norms
* In house Lab reports can be available upon request.


- Guides cables above sharp edges.
- Ideally used to mount cables
 - Bulk head
 - Cabinet holes
 - Lightening holes

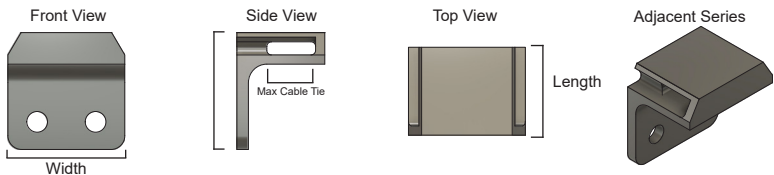

RIGHT ANGLE ADJACENT MOUNT							
PART NO.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	MAX CABLE TIE (mm)	SCREW SIZE (mm)	STATIC LOAD (KG)
ARABM - A 01	15	12	14	20	5	3.00	2.25
ARABM - A 02	25	20	25	45	10	4.50	6.50

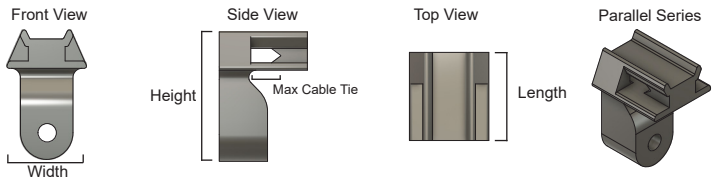

RIGHT ANGLE PARALLEL MOUNT							
PART NO.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	MAX CABLE TIE (mm)	SCREW SIZE (mm)	STATIC LOAD (KG)
ARABM - P 01	18	20	28	20	6	4.00	3.50

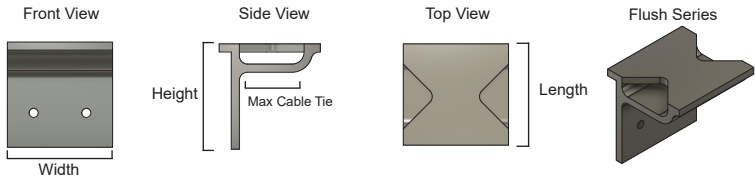

RIGHT ANGLE FLUSH MOUNT BASE							
PART NO.	WIDTH (mm)	LENGTH (mm)	HEIGHT (mm)	MAX CABLE BUNCH DIA (mm)	MAX CABLE TIE (mm)	SCREW SIZE (mm)	STATIC LOAD (KG)
ARABM - F 01	26	25	26	40	14	4.5	8.50

* Standard Packing is 100 pcs (Pkt)
* Tolerance Width + / - 0.30 Thickness + / - 0.20
* Optional Colour, Sizes can be provided upon request